

## Online V2

### Contents

|          |                              |          |
|----------|------------------------------|----------|
| <b>1</b> | <b>Introduction</b>          | <b>1</b> |
| <b>2</b> | <b>Electronic DAQ</b>        | <b>1</b> |
| <b>3</b> | <b>Online server</b>         | <b>2</b> |
| 3.1      | Syslog and Syslogd . . . . . | 2        |
| <b>4</b> | <b>Slow control software</b> | <b>3</b> |
| <b>5</b> | <b>DAQ software</b>          | <b>3</b> |
| <b>6</b> | <b>Data base</b>             | <b>3</b> |


## 1 Introduction

Spécifications :

- GASOLine.odp
- Spécifications GASOLine.pdf
- IEEE\_NARVAL.pdf

Divide and conquer: use the modular conception historically introduce by electronics.

- Physical detector
- Electronic DAQ
- Online server
- Slow control software
- DAQ software
- Database (included or not into the SLC module)

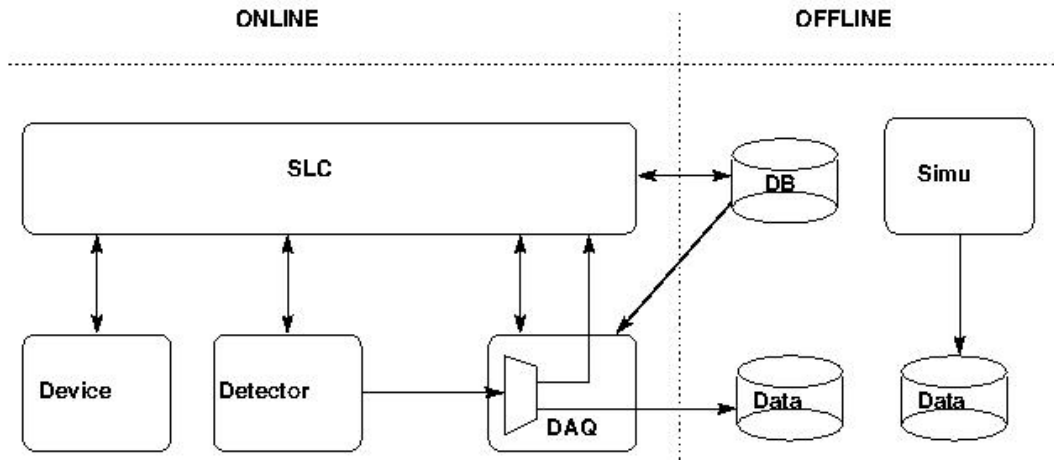

## 2 Electronic DAQ

- The electronic DAQ is the layer to interact with the detector composed by ASU cards.
- The electronic DAQ is composed by DIF, potentials DCC, LDA and CCC cards.
- The electronic DAQ is driven by a unique CCC card managing the global state machine.
- The electronic DAQ is accessible via an undefined number of LDA cards (about 3).
- The electronic LDA cards cannot be access by two different machine at a time.
- The electronic LDA cards offer only one ethernet physical port to software.
- The electronic LDA's software ports cannot be slitted into data and control IP ports by a switch.

## 3 Online server

The goal of this new version is to allows 2 programs (data acquisition and slow control) to run in the same time.

- The online server act as an IP switch providing both slow control and data acquisition output cables.  
**Note:** the reason to upgrade from a library to a server is to divide by 2 the memory and cpu resources of the PC that drives the LDA.
- The server will embed at less 2 thread, one for data acquisition and one for slow control.
- The server will duplicate internally all the electronic DAQ cards registers.
- The slow control API will evolve up to SOAP API.
- The data acquisition API will allows TCP pushing (one more thread) or shared memory buffer Pooling.
- The Online server will not anymore connect to the database to read the elctronic DAQ configuration, this information will be given by the slow control software or else by a local XML file.

Todo:

- Logger
- Pcap injector (to test using tcpdump)
- Callback-function that listeen (to test with the injector)
- SLC Thread drive by socket (to test with telnet)
- SLC queries for internal Tree configuration (to test with telnet)
- SLC query for detector configuration
- DAQ output

### 3.1 Syslog and Syslogd

#### Syslogd server

```
# apt-get install sysklogd
    file /etc/sysklogd.conf or /etc/default/syslogd
SYSLOGD="-r -m0"
    file /etc/syslog.conf or /etc/rsyslog.conf.d/50-default.conf
local4.debug          /var/log/GASoline.log
# /etc/init.d/sysklogd restart
```

**Syslog client** file */etc/syslog.conf* or */etc/rsyslog.conf.d/50-default.conf*

```
local4.debug          /var/log/gasoline.log
local4.debug          @polntnr
# /etc/init.d/rsyslog restart
or
# /etc/init.d/syslog restart
$ cd gasoline/log
$ ./utlog -f local4 -s debug
```

## 4 Slow control software

- By using dedicated ethernet cables for the slow control, we can imagine a unique slow control GUI running on another host and managing all the Electronic DAQ.
- The main advantage of a dedicated SLC soft among XDAQ is a friendly approach to the database (a GUI).
- Indeed, the slow control program will evolve around a python tree-view imported from and exportable to the DB.
- The slow control program should also drive the DAQ software, we guess using SOAP too.

## 5 DAQ software

- The DAQ software is mainly an event builder that serialise all the events from electronic DAQ into a physical output format.
- The DAQ's output must be both store on hard-disc and send to a real-time monitoring software.
- We are wandering if or if not the DAQ software should have access or not to the database.
- We must define a policy for lost packets that will not penalise the electronic DAQ neither the software DAQ.

## 6 Data base

- Need to enter the ECAL detector parameters into the oracle DB.
- Is the DB for configuration and for run acquisition storage the same ?