Filtre

Contents

1 Introduction **1**

2 Modèle conceptuel des traitements **1**
2.1 In 1
2.2 Out 1
2.3 Data 1

3 Implementation **2**

1 Introduction

Cette page décrit le traitement '**filter**' faisant partie de l'activité '**actors**'.

Le but de ce traitement est de traiter les données de l'expérience puis de les difuser aux autres acteurs.

2 Modèle conceptuel des traitements

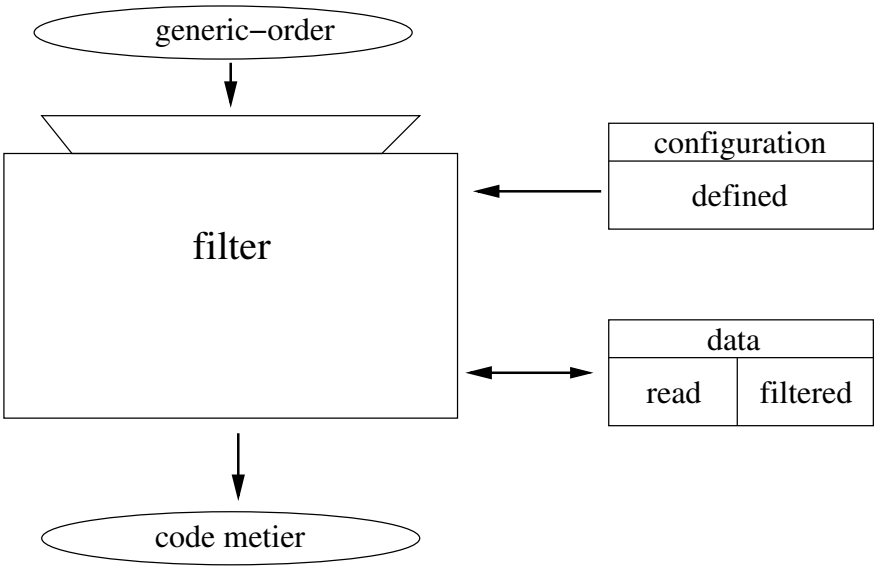

2.1 In

Nous simplifions ici le modèle des traitements en ométant les ordres génériques décrits au niveau de l'activité.

2.2 Out

Ce traitement génère l'évènement suivant :

- *code-métier* à destination du traitement ???

2.3 Data

Un scénario spécifie la configuration le code métier à charger par l'acteurs.
Les données sont traitées à la volée. Chaque n-uplet étant indépendant des autres.

- `in` : Objet **scénarios**
- `in/out` : Objet **data**

3 Implementation

Cet acteur est implémenté par le fichier */cvs/narval/actors_LC/filters/LC_filter.c.*

```
void process_block (struct my_struct *algo_data,
                    void *input_buffer,
                    unsigned int size_of_input_buffer,
                    void *output_buffer,
                    unsigned int size_of_output_buffer,
                    unsigned int *used_size_of_output_buffer,
                    unsigned int *error_code)
{
  int i;
  *error_code = 0;
  *used_size_of_output_buffer = 0;

  if (size_of_input_buffer != 8 || size_of_output_buffer < 8)
    {
      printf("filter:\terror\n");
      *error_code = 1;
      goto error;
    }

  printf("filter: \t%s\n", (char*) input_buffer);

  for (i=0; i<8; ++i)
    {
      ((char*)output_buffer)[i] = ((char*)input_buffer)[i];
    }

  *used_size_of_output_buffer = 8;
 error:
  return;
}
```